

Adaptec Hybrid RAID Solutions

Combining SSDs and HDDs for Maximum Performance and Reliability

Introduction

As user demand for speed grows and applications become more and more robust, data centers face a constant battle to increase their infrastructure performance accordingly. Some components offer a relatively straightforward upgrade path: CPUs continue to get more powerful, networking speeds increase, disk drive capacities grow, and so on. But these advances mean little if the rate at which I/O operations can be performed doesn't keep pace.

For example, an online transaction processing system is often limited by the rate at which database updates can occur. The performance of a search algorithm may depend on how quickly various data structures can be read from disk. The number of users that can successfully access a website depends on how quickly the web pages can be served.

Growth in the number of end-users compounds the problem by cause longer response times and increasing latency. According to Equation Research:¹

- 78% of site visitors have gone to a competitor's site due to poor performance during peak times.
- 88% are less likely to return to a site after a poor user experience.
- 47% left with a less positive perception of the company.

To boost system performance, data centers will sometimes add very fast hard disk drives (HDDs) — for example 15,000 RPM Serial Attached SCSI (SAS) drives — and “short stroke” them, which means that applications use only the outermost tracks on the disks where the performance is best. Or, they may add new servers, even if the existing servers have the storage capacity for more users.

Either method, however, results in low storage capacity utilization. On top of that, adding more servers leads to an increase in capital and operating expenses — namely maintenance, power and cooling costs — as well as physical space requirements.

The proliferation of Solid State Drives (SSDs) alleviates many of these problems, and is changing the way data centers think about their storage architecture.

SSDs: Performance in a Flash

SSDs offer several advantages over HDDs, including higher read bandwidth, higher IOPs, better mechanical reliability, and higher resistance to shock and vibrations. However, the same features (i.e., flash) that provide these advantages also come with some inherent limitations compared to HDDs, such as limited capacity and lower streaming write bandwidth.

Another limitation of SSDs is that they cannot directly overwrite data like an HDD can. Instead, the entire destination data block

must first be erased before new data can be written – even if only a few bytes are changed. Not only does this process negatively impact write performance, it can cause uneven wear on the surface of the flash medium and lead to premature failure of the drive.

To combat uneven wear, many SSDs employ wear leveling to distribute erasures and rewrites evenly across the medium surface. Wear leveling extends the life of the drive but, over time, also further degrades write performance.

SSDs are also much more expensive than HDDs, especially when measured using the traditional “cost per GB of capacity” metric. In most environments it is simply impractical to replace every HDD with an SSD, regardless of the potential benefits.

However, a hybrid approach that combines HDDs and SSDs can be extremely cost efficient, especially when measured in terms of the “cost per I/O operation” or the more Green-oriented “power consumption per I/O operation”.

What is Hybrid RAID?

Hybrid RAID is a redundant storage solution that combines high-capacity, low-cost SATA or higher-performance SAS HDDs with low latency, high IOPs SSDs and an SSD-aware RAID adapter card (Figure 1).

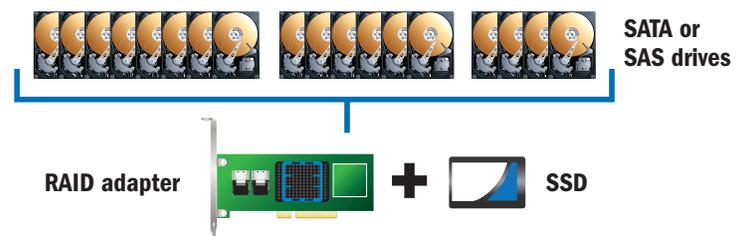


Figure 1. Hybrid RAID Deployment

In Hybrid RAID, read operations are done from the faster SSD and write operations happen on both SSD and HDD for redundancy purposes.

Hybrid RAID is ideal for applications with low levels of data, such as an Internet gateway, file server or virtual machine.

What Are the Benefits of Hybrid RAID?

Hybrid RAID arrays offer tremendous performance gains over standard HDD RAID arrays at a much lower cost than SSD-only RAID arrays. Compared to HDD-only RAID arrays, Hybrid arrays accelerate IOPs and reduce latency, allowing data center and cloud computing environments to host more users and perform more transactions per second on each server, which reduces the number of servers required to support any given workload.

¹ “When more Website visitors hurt your business: Are you ready for peak traffic?”
Equation Research 2010

Adaptec Hybrid RAID Solutions

Not only does the reduction in servers lead to reduced server footprint requirements within the data center, there is the additional financial benefit of reducing the capital expenses required to purchase additional servers, as well as the operating expenses associated with power, cooling, and maintenance.

Hybrid RAID Examples

Incorporating Hybrid RAID into a storage solution opens up a wide range of possibilities for maximizing capacity, boot times, and overall performance, as shown in the following examples.

Scenario 1: Large-Capacity Servers

In this scenario, the customer wants to make the maximum use of space in a large capacity, 8-bay server, while still gaining a fast-booting server. The customer is conservative and wants to keep OS away from data (OS in mirror and data in RAID 5 for maximum capacity).

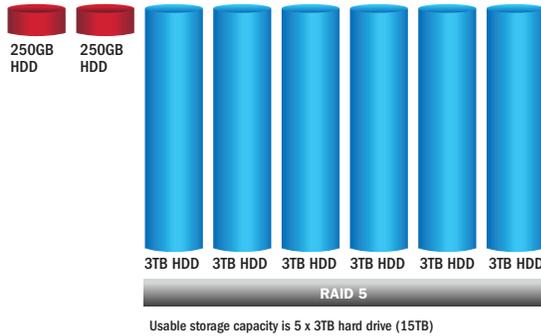


Figure 2. Large-Capacity Server, Traditional HDD-Only Method

The problem with an HDD-only method (Figure 2) is that it wastes two bays in the server to the OS boot drives, and therefore limits capacity to six drives in RAID 5. Additionally, the server does not boot particularly quickly as it is booting from standard HDD in mirror, which is not a particularly fast form of RAID.

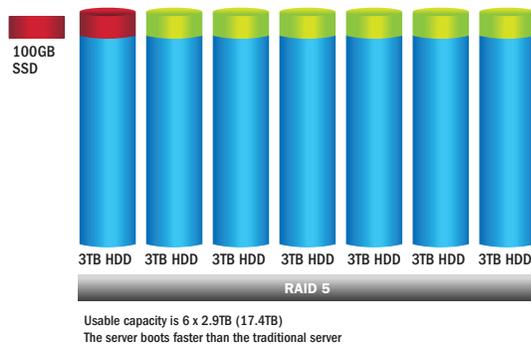


Figure 3. Large-Capacity Server, Hybrid RAID Solution

The Hybrid solution (Figure 3) offers several benefits:

1. Total server capacity is six times the usable capacity of each drive in a RAID 5.
2. The server will boot quickly as it is reading from an SSD during the boot process

3. The unused disk space on each disk can be utilized in another array if required.
4. In the above scenario, a 500GB RAID 5 disk could be created across the six unused disk segments.

Scenario 2: Workstation

In this scenario, the workstation user wants a fast-booting, fast application-loading system and doesn't want the hassle of having to rebuild the workstation if a drive fails.




Figure 4. Workstation Hybrid RAID Solution

The advantages of the Hybrid solution (Figure 4) include:

1. All reads are directed from the SSD, so read speed of the workstation is dramatically improved over that of a standard single HDD.
2. Write speed is the same as a standard workstation, but due to the cache on the adapter card, it will be faster than a standard HDD connected to an on-board disk adapter.
3. Data is not lost if either drive fails. When the failed drive is replaced, the array will rebuild onto the replacement drive, putting the system back the way it was before the drive failure.

Note that it is not recommended to use this unused 200GB capacity on the 500GB HDD due to the fact that this data is not redundant, and failure of the HDD would result in data loss.

Scenario 3: Small Business Server

Many small business servers require at least some high-performance storage component to handle accounting software, industry-specific small databases and even mail servers. Along with that performance is always the requirement for capacity. Even small business can easily generate several TB of data in the form of documents, photos, video etc.

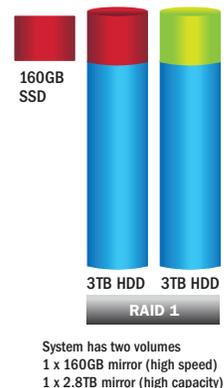


Figure 5. Small Business Server, Hybrid RAID Solution

Adaptec Hybrid RAID Solutions

The advantages of this Hybrid solution are:

1. The 160GB disk is big enough to create a boot volume for the OS while still leaving enough space for a 100GB volume for database function.
2. Because the 160GB hybrid mirror reads directly from the SSD, both OS boot time and database function will be greatly improved over a standard mirror of two HDDs.

160GB is lost from the capacity of the data mirror, but that is a small percentage of capacity loss on the 3TB drives, and does not significantly impact on the usable capacity of the server.

Scenario 4: Small Business Server

The previous configuration requires at least a 4-port RAID card, but the fourth port is unused. Extending the server to utilize all four ports is simply a matter of purchasing a second 160GB SSD to mirror to the unused space from the previous example.

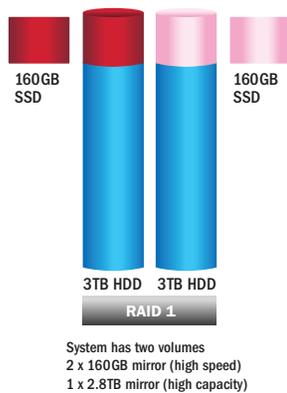


Figure 6. Small Business Server, Hybrid RAID Solution

It might seem more sensible to mirror the two SSDs, and then mirror the two HDDs in what would seem a more conventional server. However, there is good reason to do the above:

1. The write speed of lower-spec SSDs is not much faster than that of HDDs, so there is little to be gained by mirroring the two SSDs.
2. Since the read speed of the SSD is so quick, putting them in a mirror will not result in much improvement over a single SSD.
3. Since the focus is on read speed, having two Hybrid RAID arrays now gives 320GB of SSD read speed to the server, while still protecting the data on each SSD in the form of a mirror.
4. The HDD capacity of the server is not sacrificed from the previous example.

Scenario 5: Small Business Server, High-Speed, Small Capacity

If performance is more important than capacity, then the user can install two 600GB SSDs and mirror them to the HDD, thus gaining 1.2TB of SSD capacity (Figure 7).

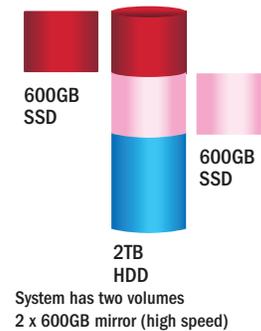


Figure 7. Small Business Server, High-Speed, Small Capacity Hybrid RAID Solution

Note that it would be possible in this configuration to add a third SSD (using the fourth port on the RAID card), to give three hybrid mirrors on a total of three SSDs and one HDD.

Building a Hybrid Solution

From a hardware perspective, building a Hybrid RAID solution is fairly straightforward as any capacity of SSDs and HDDs can be used (though an equal number of SSDs and HDDs must be used). If the RAID array is built from different-sized drives, the drive segment size is the size of the smaller disk drive. For example, a RAID 1 created with one 128GB SSD and one 2TB HDD will make a 128GB logical device. A RAID 10 created with two 128GB SSDs and two 2TB HDDs will make a 256GB logical device. The remaining HDD capacity can be used for storage.

From an application perspective, though, it's not quite as simple since most software was not created to be aware of the possibility of having two types of storage with such different characteristics.

In order to take full advantage of a Hybrid RAID setup, an SSD-aware RAID adapter with intelligent storage processing must be deployed.

Adaptec Hybrid RAID Solutions

Fortunately, reaping the rewards of Hybrid RAID technology can be as simple as installing updated firmware onto any Adaptec Series 7, Series 6, or Series Q SAS/SATA RAID adapter. The adapter takes care of the rest by automatically creating a Hybrid RAID array whenever one or more SSDs are combined with the same number of HDDs in a RAID 1 or RAID 10 array. The Hybrid RAID is completely transparent to the operating system and all running applications.

Additionally, Adaptec RAID adapters deliver maximum Hybrid array performance by writing to both HDD and SSD, and reading from SSD 100% of the time (Figure 8). By contrast, other adapters write and read from HDD and SSD (Figure 9). Since server I/O of an SSD can be up to 100 times faster than HDD, competitive Hybrid RAID solutions typically deliver lower I/O performance.

Adaptec Hybrid RAID Solutions

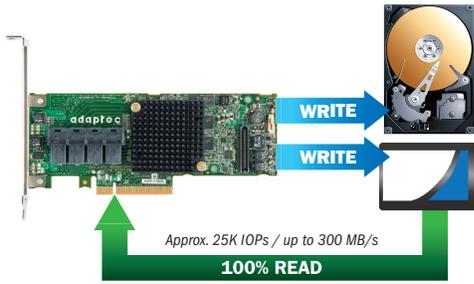


Figure 8. Adaptec Hybrid RAID Solution

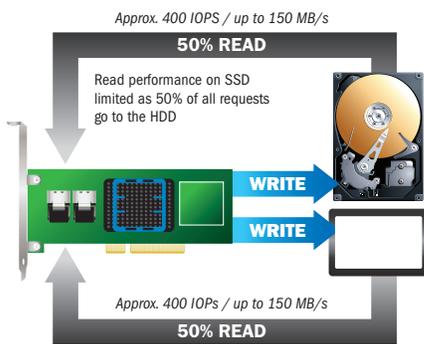


Figure 9. Competitive Hybrid RAID Solution

Adaptec Hybrid RAID arrays deliver a higher number of read operations per second than standard HDD arrays with no degradation of write I/O performance (Figure 10).

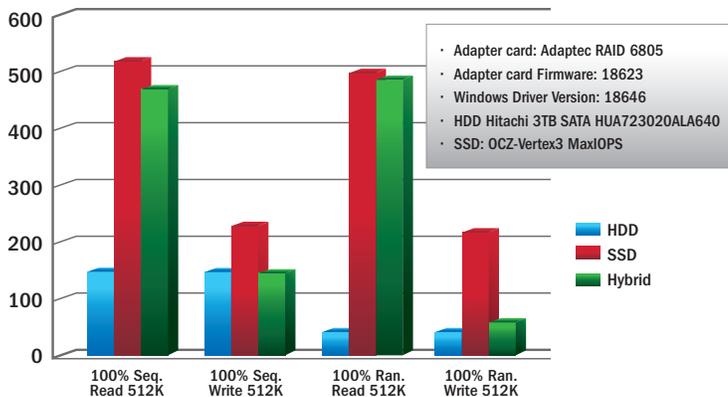


Figure 10. IOMeter Raw Performance

Some applications even see a slight performance benefit from Adaptec Hybrid RAID and are faster on a Hybrid RAID 1 than on a single SSD (Figure 11).

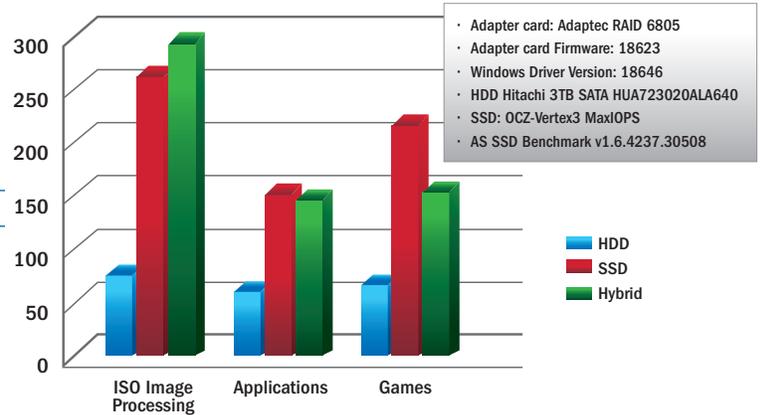


Figure 11. AS SSD Application Performance

As such, Adaptec Hybrid RAID offers better performance and lower cost/GB, and lower cost and power consumption per I/O than competing Hybrid RAID solutions.

Conclusion

Data centers face never-ending pressure to accommodate more users and more traffic. In the face of tightening budgets, however, the days of simply adding more servers are coming to an end.

Hybrid RAID arrays of SSDs and HDDs offer significantly better performance than standard HDD RAID arrays at a lower cost than SSD-only arrays.

Adaptec Series 7, Series 6, and Series Q SAS/SATA RAID adapters with the latest firmware updates can automatically create a seamless Hybrid RAID array whenever one or more SSDs are combined with the same number of HDDs in a RAID 1 or RAID 10 array. Unlike competing RAID adapter cards that read from the HDD 50% of the time, Adaptec cards deliver maximum system performance by reading only from the SSD.

Compared to HDD-only arrays, Adaptec Hybrid arrays deliver a higher number of read operations per second with no degradation of write I/O performance, and complete transparency to the operating system and all running applications. Compared to SSD-only arrays, Adaptec Hybrid arrays offer the lowest cost/GB and lowest cost and power consumption per I/O.



PMC-Sierra, Inc.
1380 Bordeaux Dr.
Sunnyvale, CA 94089 USA
Tel: +1 (408) 239-8000

World Wide Web: www.adaptec.com
Pre-Sales Support: US and Canada: 1 (800) 442-7274 or (408) 957-7274 or adaptec-sales@pmc-sierra.com
UK: +44 1276 854 528 or uk_sales@pmc-sierra.com
Australia: +61-2-90116787
Singapore: +65-92351044